

P ZEROTM ROAD TLR

ALL-ROUND PERFORMANCE

DESIGNED FOR:

HANDLING

COMFORT

PROTECTION

TECH HIGHLIGHTS

EVO² COMPOUND

TECHLINER[®] ROAD


TUBELESS
READY



DESCRIPTION

The most complete and versatile tyre in its range, now with TLR technology. The **P ZEROTM ROAD TLR** is intended to be the perfect solution for cyclists who are looking for a more balanced and all-round performance focused on endurance. Used as a training tyre by our professional riders, P ZEROTM ROAD TLR is the perfect compromise between speed and comfort and protection. An all-in-one product to accompany you on all your rides. The technology behind P ZEROTM ROAD TLR is the innovative **TechLINER casing**, a 120 TPI casing coupled with a **rubber liner for better pressure retention**, this coupled with the amazing grip and control of the **Evo compound**, allows for smooth reliable performance.

CHARACTERISTICS

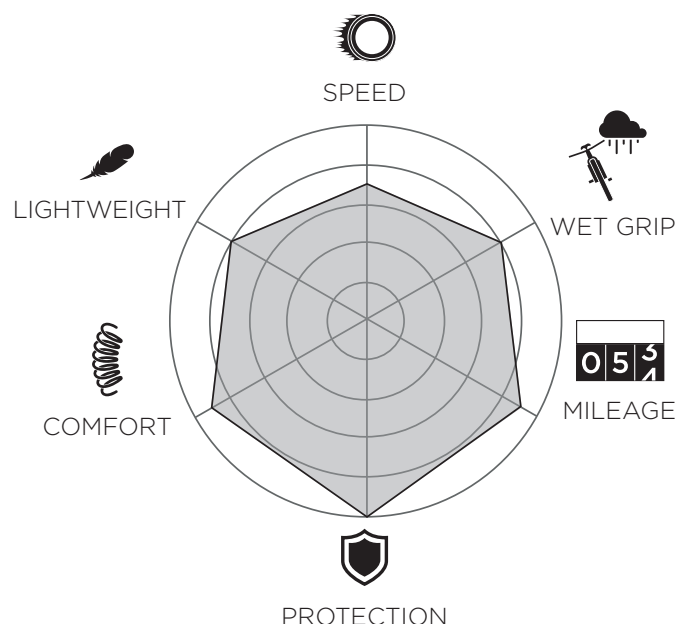

APPLICATIONS



SEASONALITY (☀ & ☁)



□ NOT INTENDED USE

■ POSSIBLE USE

■ INTENDED USE

TECH OVERVIEW

1 COMPOUND



High-tech formulation that provides good grip and low rolling resistance at the same time, offering a great balance of mileage and all-round performances.

ALLOWS YOU TO RIDE LONGER AND FURTHER


2 STRUCTURE



State-of-the-art TLR casing technology with an inner rubber layer for maximum pressure retention.

FAST, COMFORTABLE AND RELIABLE

3 MOUNTING & SIZING



TUBELESS READY

Rim compatibility developed under ETRTO standards and for modern wide rims

Hookless compatibility:

- sizes **compatible** with hookless rims subject to ETRTO **5bar/73psi max pressure limitation.**

PZERO™ RACE TLR 28-622

Size development @5,5 bar/80psi

RIM	WAM	OUTER DIAMETER	RAM
17 C	27mm	686mm	343mm
19 C	28mm	686mm	343mm
21 C	29mm	686mm	343mm

PZERO™ RACE TLR 32-622

Size development @4,5 bar/65psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	31mm	692mm	346mm
21 C	32mm	692mm	346mm
23 C	33mm	692mm	346mm

PZERO™ RACE TLR 30-622

Size development @5 bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
19 C	29mm	690mm	345mm
21 C	30mm	690mm	345mm
23 C	31mm	690mm	345mm

PZERO™ RACE TLR 35-622

Size development @5 bar/73psi

RIM	WAM	OUTER DIAMETER	RAM
21 C	34mm	696mm	348mm
23 C	35mm	696mm	348mm
25 C	36mm	696mm	348mm

DESCRIPTION	RIM	IPCODE	CASING	TECHNOLOGY	WEIGHT (g)	COMPOUND
PZERO™ Road TLR 28-622	19 C	4114300	120tpi, TLR	TechLINER	340	Evo Compound
PZERO™ Road TLR 30-622	19 C	4114400	120tpi, TLR	TechLINER	370	Evo Compound
PZERO™ Road TLR 32-622	21 C	4155200	120tpi, TLR	TechLINER	400	Evo Compound
PZERO™ Road TLR 35-622	23 C	4292900	120tpi, TLR	TechLINER	430	Evo Compound